

Technical parameters:

		FRJJS 034-1,15/4x18/1	FRJJS 034-0,8/4x10,25/4
Rated capacitance	C _N	72 μF -5/+10% (4x 18 μF)	41 μF -5/+10% (4x 10,25 μF)
Rated voltage	U _N	1150 V ef	800 V ef
Rated frequency	f _N	1 kHz	4 kHz
Rated current	I _{max}	520 A (4x 130 A)	824 A (4x 206 A)
Rated power	Q _N	600 kvar (4x 150 kvar)	660 kvar (4x 165 kvar)
Weight		18 kg	15 kg
Height	H	250 mm	180 mm


Technical characteristics:

Live case		
Water cooling	WF	
Outlet water temperature	40°C	
Water rate of flow	min. 2 l/min	4l/min
Water pressure	max. 0,6 MPa	
Liquid	JARYLEC	
Standard	IEC 60110/98	
Max. torque M12	15 Nm	
Max. torque M20x1,5	20 Nm	

Testing parameters:

Voltage test between terminals 4x U_N DC or 2x U_N AC for time 10s

Diagram of connections:

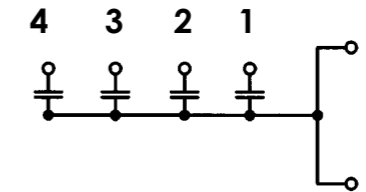

Pcs.	Dimensions	ZEZ SILKO	Surface finish:	
Standard	Material		Accuracy to size : ..	
Notice:			linear : ..	
INDEX	a	new type	26.11.08	Hruša
			DATE	SIGNATURE
TITLE			Scale 1:3	Weight
OFFER			DRAWING No. 3BF1432a	Sheet 1 Of 1 Size A3